




Xprinter® 芯焯 XINYE

Compact design, ideal for counter spaces

Thermal Receipt Printer

XP-R330H

- 58mm/80mm/82.5mm paper width available
- IAP function supports firmware update within 90S. Make printer maintained easily.
- Reliable cutter with intelligent code to prevent cutter from cutter jammed.
- Metallic frame mechanism

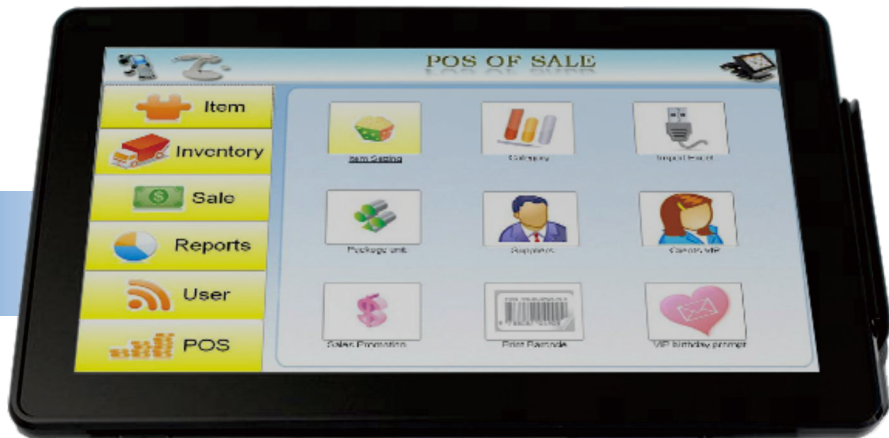

TOP EXIT



FRONT EXIT



XP-R330H

Thermal Receipt Printer



MODEL	XP-R330H
Printing method	Direct thermal
Printing speed	300mm/s
Paper width	82.5 mm/80mm/58mm
Printable area	72mm(adjustable by commands)
Maximum paper diameter	Φ83 mm
Paper thickness	0.06-0.08mm
Column capacity	576 dots/line(adjustable by commands)
Line space	3.75mm(Changeable by commands)
Commands	Compatible with ESC/POS
Interface type	USB+Serial / USB+Lan
Character size	ANK, Font A: 12×24 dots Font B: 9×17 dots simplified/traditional Chinese: 24x24 dots
Dimension	133×126×130mm (D×W×H)
Gross weight	1.115kg
Bar code	UPC-A/UPC-E/JAN(EAN13)/JAN8(EAN8)/CODE39/ITF/CODABAR/CODE93/CODE128
2-dimension code	QR CODE / PDF417
Code page	PC347(Standard Europe), Katakana, PC850(Multilingual) , PC860(Portuguese), PC863(Canadian-French), PC865(Nordic), WestEuropeGreek, Hebrew, East Europe, Iran, WPC1252, PC866(Cyrillic#2), PC852(Latin2), PC858, IranII, Latvian, Arabic, PT151(1251)
Cutter	Partial
Cutter life	1.5 million cuts
Print head life	150KM
Input buffer	64 Kbytes
NV Flash	256 Kbytes
Power adaptor	AC110V/220V, 50~60Hz
Power source	DC 24V/2.5A
Cash drawer output	DC 24V/1A
Work environment	Temperature: 0~45°C, humidity: 10~80RH%
Storage environment	Temperature: -10~60°C , humidity: 10~90RH%
Operating system	Win XP/Win Vista/Win 7/Win 8/Win 8.1/ Win 10 /Linux



Scan QR code to checkout Xprinter website for more update information.
 Phone: (+86 756) 3895 852
[Http://www.xprintertech.com](http://www.xprintertech.com)
 Email: overseas@xprinter.net

